



Original Rib W1

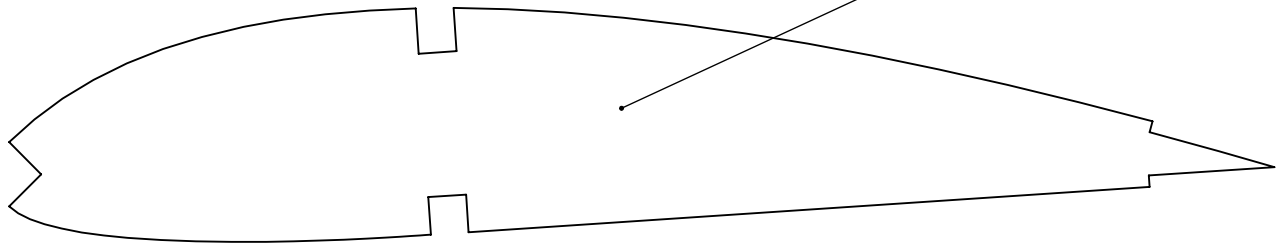


CG located at mid-spar plus/minus 3 mm
For GG choose forward position

Aileron modified Rib

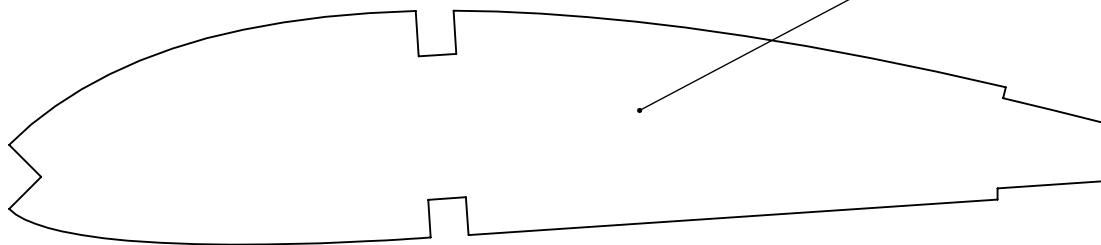


$\frac{1}{3} \times \frac{1}{4}$

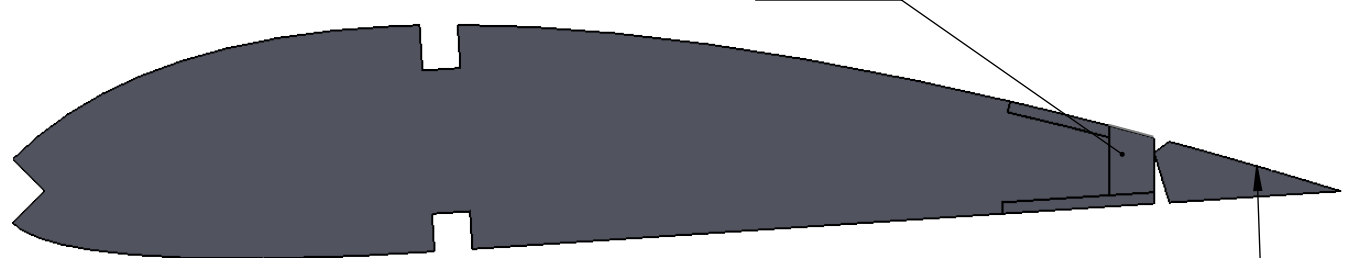


Rib modification to accept ailerons,
mods from first rib after central sheeting
all the way to wing tip.

Preshaped Triangular
Trailing edge $\frac{1}{3} \times 1"$

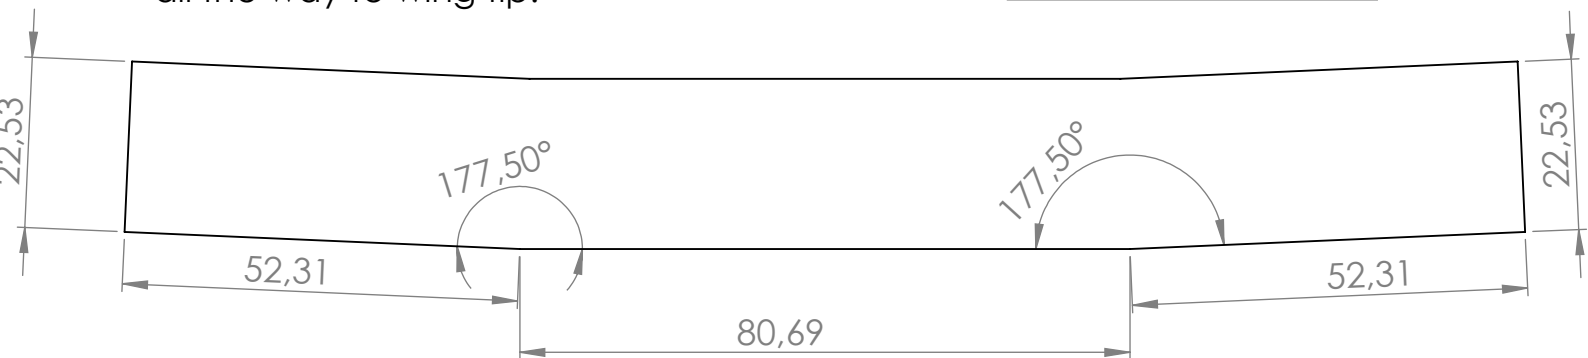

W3 - 2 req'd



W4 - 2req'd

CG located at mid-spar plus/minus 3 mm
For GG choose forward position

A suitable servo plate to placed between the 2 first W1 rib